


# V180F & V250F DRAINAGE PUMP

CW FLOAT SWITCH & 6M CABLE

## Performance Chart

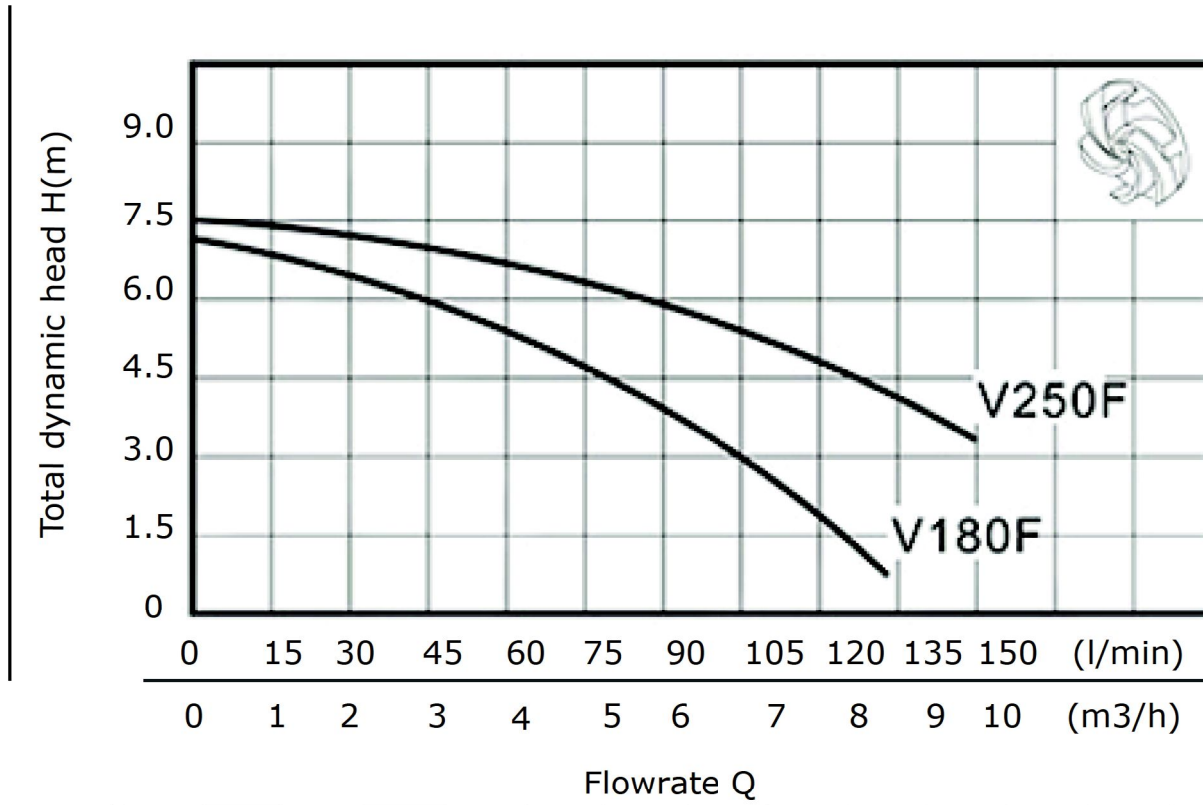

## Performance Table

Model	Power (kW)	Outlet Diameter (mm)	Voltage/Frequency (V/Hz)	Max. Flow (l/min)	Max. Head (m)	Max. Diameter of Particle (mm)	G.W. (kg)
V180F	0.18	32,40	220/50	133	7	15	9.0
V250F	0.25	32,40	220/50	150	7.5	15	9.5



### Application

- Waste water drainage in factories, construction sites and commercial facilities
- Drainage system in municipal sewage treatment plants
- Drainage stations in residential quarters
- Municipal projects
- Methane pools and field irrigation in countryside

### Pump

- Max. immersion depth: 5 m
- Max. liquid temperature: 40 C
- Liquid pH value: 4-10
- Max. liquids density: 1.2 x 10kg/m

### Motor

- Copper winding
- Built-in thermal protector
- Stainless steel welded shaft
- Insulation Class: B
- Protection Class: IPX8