

# PM

## Series Peripheral Pump

### Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C

### Pump

- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

### Motor

- Single Phase
- Motor Housing: Aluminium
- Shaft: Carbon Steel / Stainless steel
- Insulation: Class B
- Protection: IP44
- Cooling: External Ventilation




PM Series Peripheral pump



JET-JM Series pump with PS-01 controller  
Available for: PM-45  
PM-80

# PM

## Series Peripheral Pump

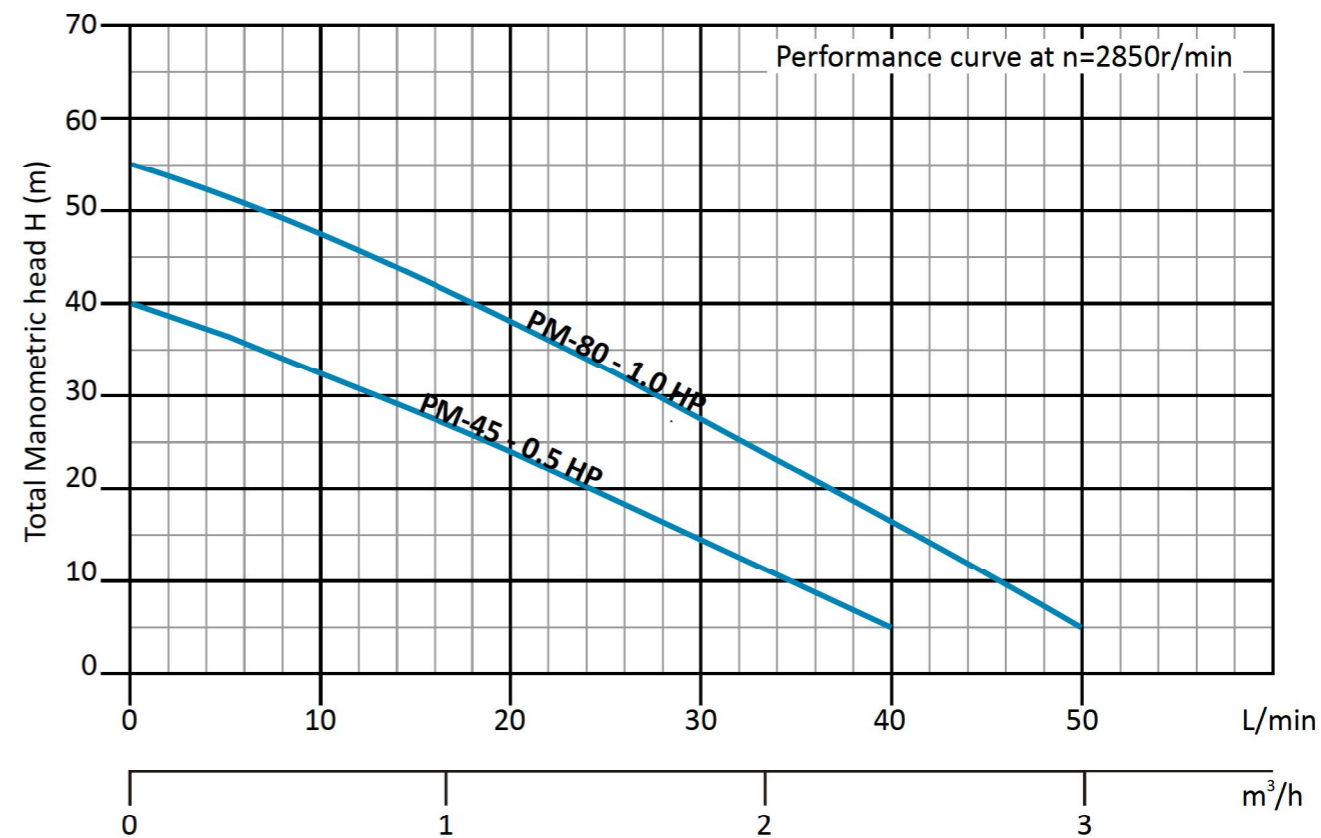

### Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min				
	Input max kW	Output Power		Current A	Q.max L/min	H.max m	Suct.max m	DNA Inch	DNM Inch
		kW	HP						
PM-45	0.50	0.37	0.50	2.50	40	40	9	1"	1"
PM-80	1.10	0.75	1.00	5.20	50	55	9	1.5"	1.5"